

◆ Characteristic / 特點:


- Open collector output allows a wide range of applications, such as direct relay drive and P.L.C input.
/ 開路集極輸出方式. 可應用於PLC作取樣用或驅動直流負載.
- Multiple output model (NO & NC and NPN & PNP open collector).
/ 多狀態控制輸出方式 (NO & NC 和 NPN & PNP 集極開路電路輸出).
- 3 light converges to spot diameter of 2 mm.
/ 紅外線發射3軸光點 2 mm大小.
- ABS housing. resin inside. Protection from oil, water, acid and alkaline.
/ ABS外殼可耐酸檢, 增加使用壽命.



◆ Specifications / 規格表:

Catalog Listing / 型號	RQ36-KP2
Output Method / 輸出模式	NPN.NO/NC PNP.NO/NC
Sensing distance / 檢測距離	36mm
Light-Emitting diode / 發光源	IR LED (950nm)
Detectable objector / 最小檢測物	5mm Min
Operating Voltage / 工作電壓	10 ~ 30 VDC
Current Consumption / 消耗電流	40 mA
Output Current / 輸出電流	30 VDC 100 mA max
Operating Temperature / 工作溫度範圍	- 25 °C ~ + 60 °C
Wiring Method / 出線方式	Ø4.2 × 2 M / 4-wire
Protection degree / 防水等級	IP 64
Recommended Power Unit / 應用電源供給單元	ST - 1 . ST - T2

◆ Dimension / 尺寸圖:

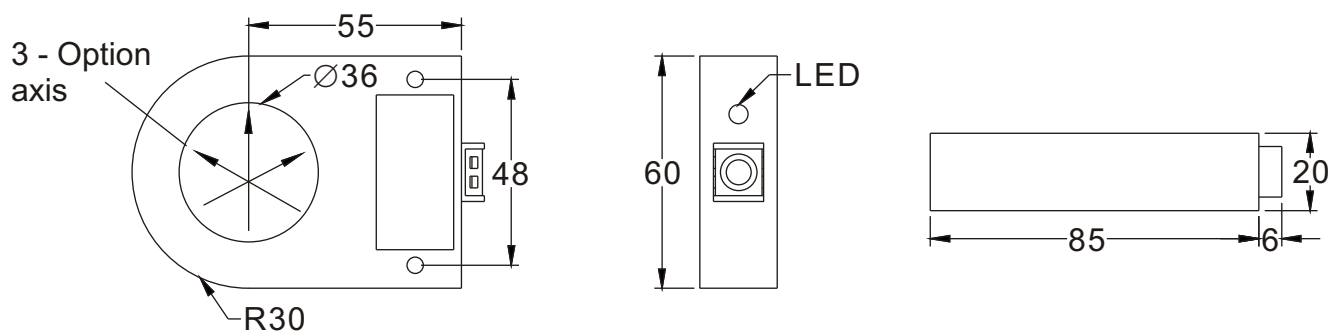

◆ Application / 應用範例:

