


BVP

()

- _____
- _____ / _____ , _____ / _____
- _____
- _____

_____ , _____ () , _____

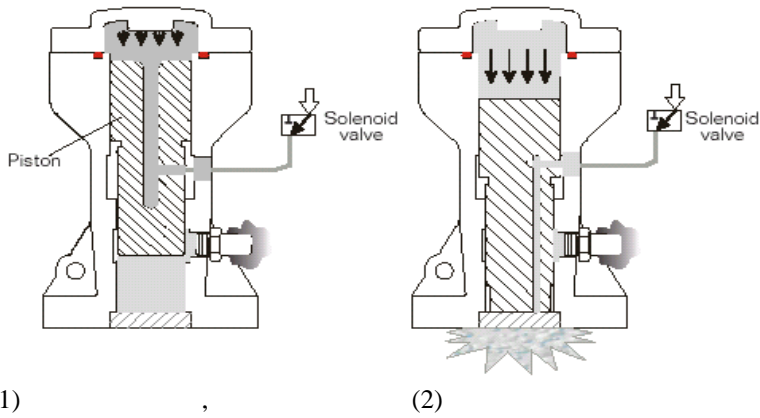


() : 100°
80 - 115

dBA

(1).

		ØB	ØC	D	ØH		
1030S (BVP-30S)	138	80	60	12	9	1/8"	1/8"
1040S (BVP-40S)	166	100	75	16	11	1/4"	1/4"
1060S (BVP-60S)	208	140	105	16	15	1/4"	1/4"



. =

	, / .			(N)			(ℓ/)	()
	2 / 2	4 / 2	6 / 2	2 / 2	4 / 2	6 / 2		
1030S (BVP-30S)	1900	2800	3500	3600	5400	6200	250	1.0
1040S (BVP-40S)	1700	2400	3000	6450	8750	9400	270	2.1
1060S (BVP-60S)	1200	1800	1900	6900	12850	13850	300	4.8