


FC3

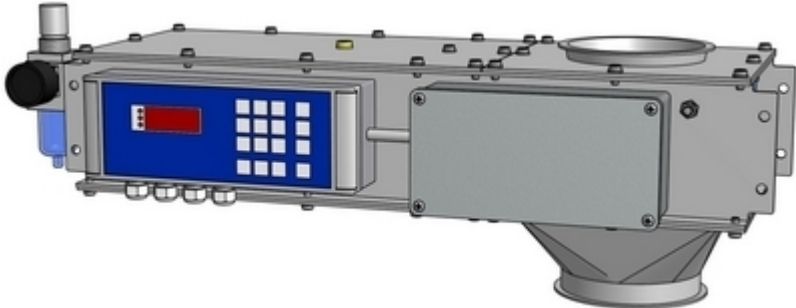

2

22.

FE 128

(24 .)

(230

.).

2

FE 325

(24 .)

(230

.).

4


FE 710


SPS

10

	:		
FC 3.15	. 120 ,		0,5 - 20 ^{3/}
: 135		, 220	
FC 3.30	150 ,		1,0 - 32 ^{3/}
: 135		, 220	
FC 3.60	200 ,		2,0 - 80 ^{3/}
: 170		, 305	
:	1 - 2 %*		.

	FE128
	A. B.
	A. 230 .

	B. 24 .
-	1 2
	LCD 128 x 64 Pixel
	25
()	RS232/485, 0 - 10 V DC, - , , ,
()	Profibus, 0(4)-20 mA,
	A. 300 x 300 x 140 (x x) B. 165 x 120 x 65 (x x)
	
	FE325
	A. B.
	A. 230 . B. 24 .

-	1 – 4 (with receipt control)
	LCD 320 x 240 Pixel
	32
()	RS232/485, 0 - 10 V DC, - , , ,
()	Profibus, 0(4)-20 mA,
	A. 435 x 340 x 180 mm (x x) B. 255 x 184 x 70 mm (x x)
	

	FE710
	24 .
-	1

	7- LED
	16
()	<p>24 :</p> <p>a) Profibus,</p> <p>b) RS232/485,</p> <p>c) (0 – 10 , - , 0(4)-20 mA)</p>
	