


RF-

SB

SB

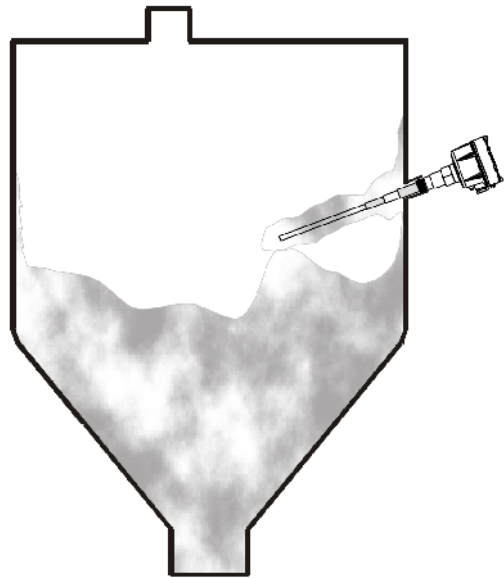


DPDT, /


SB

0-30
 IP65
 DPDT, 5A
 : 550



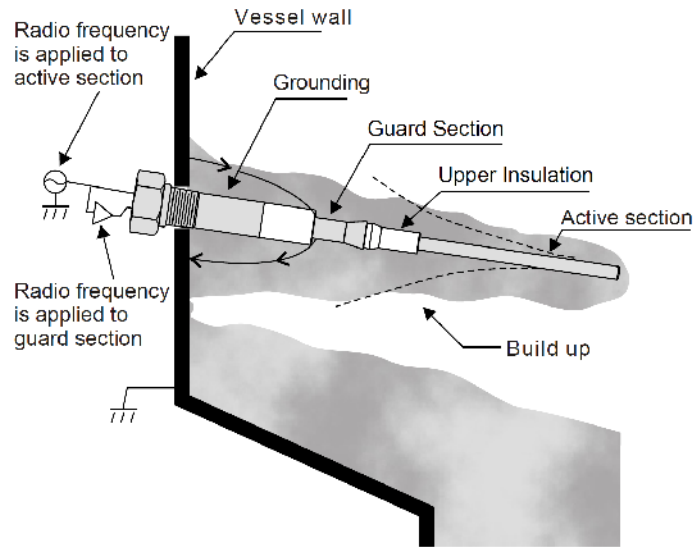

1. : SUS304 SUS316
2. : , PVDF PTFE ,
3. :
4. : ,
5. : 3/4" ()
6. :
7. : 1/2"N
8. :
9. : FSH FSL,
10. :

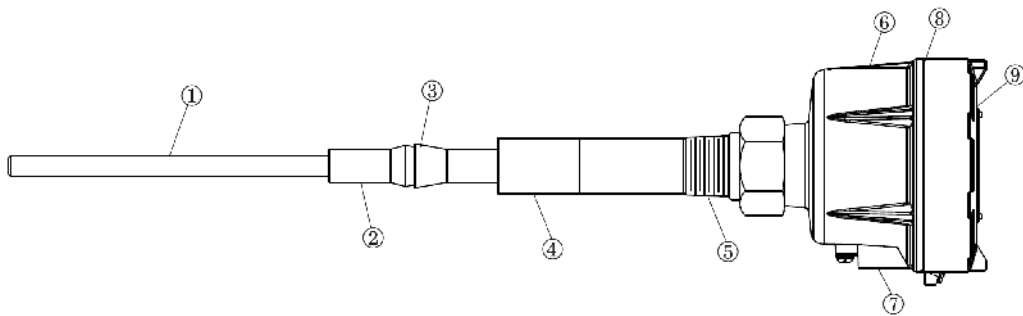

2100/2110: -

2200 : :

2280 : :

2500 :




2600 : -

17_ _ :

----- EEx d11B T1 ~ T6

()			
	SB 2100	SB 2110 SB 2120	SB 2200
		L	
	-40 ~ 150	-40 ~ 150	-40 ~ 230
	-40 ~ 70	-40 ~ 70	-40 ~ 70
(IP65)			
SUS304 SUS316			
	PTFE	PTFE	PEEK
	1"PT	3/4"PT	1"PT
	0,3 PF	0,3 PF	0,3 PF
	=24	+/-20%	115/230 . ± 10%, 50
			. 2
			~ 5 /250 , DPDT
			0-30 .
	/	/	/
1/2" NPT x 2			
20 / 2			

()


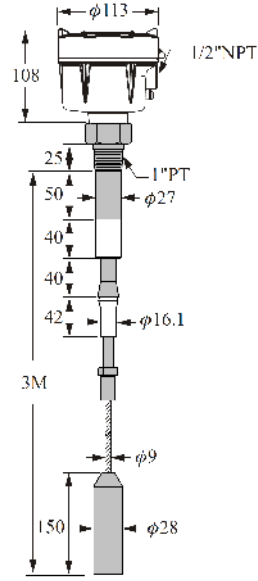
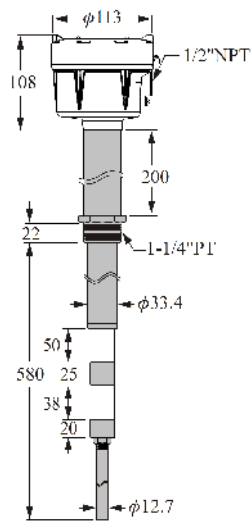



	SB2280	SB2500	SB2600
	-40 ~ +550	-40 ~ +150	-40 ~ +150
	-40 ~ 70	-40 ~ 70	-40 ~ 70
	(IP65)		
	SUS304 SUS316		
		PTFE	PTFE
	1-1/4"PT	1"PT	3/4"PT
	0,3 PF		
	=24 +/-20%	115/230	± 10%, 50
	. 2		
	~ 5 /250 , DPDT		
	0-30		
	/		
	1/2" NPT x 2		
		20 / 2	20 / 2

PTB PROOF NO. 09 ATEX 1057 II 2G EEx d IIB T1~T6
 II 2D tD A21 IP65 T445°C

<p>()</p>			
	<p>SB 1710</p>	<p>SB 1711 SB 1712</p> <p style="text-align: center;">L</p>	<p>SB 1720</p>
	<p>-40 ~ 150</p>	<p>-40 ~ 150</p>	<p>-40 ~ 230</p>
	<p>-40 ~ 70</p>	<p>-40 ~ 70</p>	<p>-40 ~ 70</p>
<p>(IP65)</p>			
<p>SUS304 SUS316</p>			
	<p>PTFE</p>	<p>PTFE</p>	<p>PEEK</p>
	<p>1"PT</p>	<p>3/4"PT</p>	<p>1"PT</p>
	<p>0,3 PF</p>	<p>0,3 PF</p>	<p>0,3 PF</p>
	<p>±24 +/-20%</p>	<p>115/230</p>	<p>± 10%, 50</p>
	<p>. 2</p>		
	<p>~ 3 /250 , DPDT</p>		
	<p>0-30 .</p>		
	<p>/</p>	<p>/</p>	<p>/</p>
	<p>1/2" NPT x 2</p>		
	<p>20 / 2</p>		

PTB PROOF NO. 09 ATEX 1057 Ⓜ II 2G EEx d IIB T1~T6
 Ⓜ II 2D tD A21 IP65 T445°C
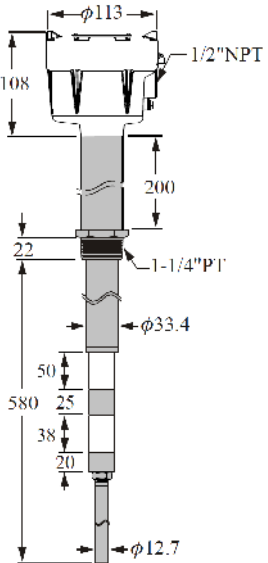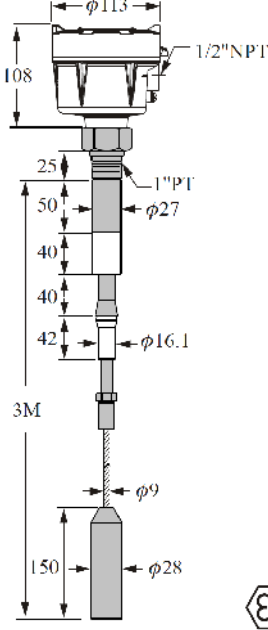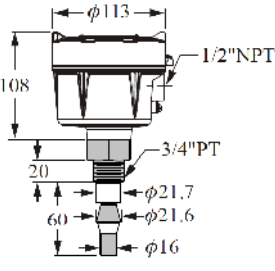
<p>()</p>			
	SB 1728	SB 1750	SB 1760
	-40 ~ +550	-40 ~ +150	-40 ~ +150
	-40 ~ 70	-40 ~ 70	-40 ~ 70
	(IP65)		
	SUS304 SUS316		
	PTFE		PTFE
	1-1/4"PT	1"PT	
	0,3 PF		
	=24 +/-20%	115/230	. ± 10%, 50
	. 2		
	~ 3 /250 , DPDT		
	0-30 .		
	/		
	1/2" NPT x 2		
	20	/ 2	20 / 2

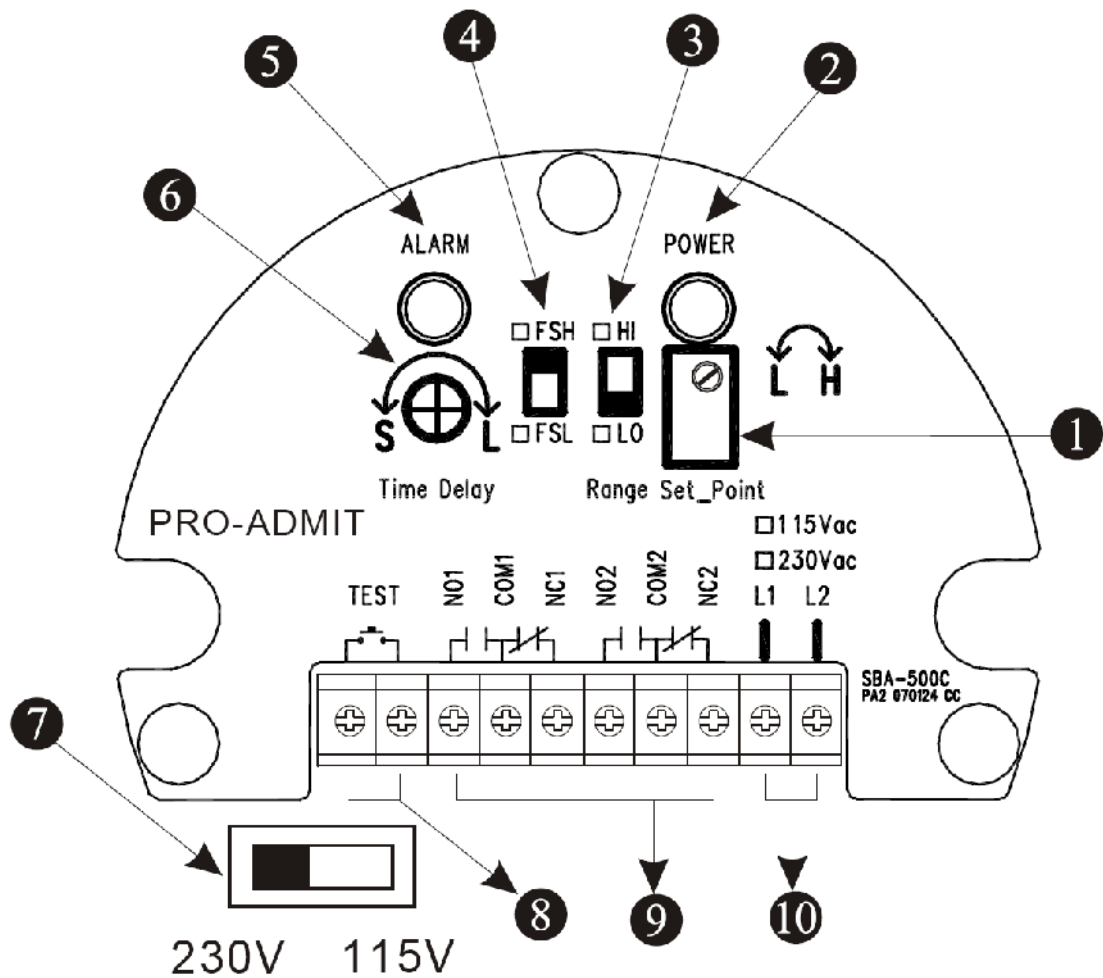

- 1 – () ,
- 2 – :
- 3 – (/)
- 4 – FSH/FSL (/)
- 5 – : FSH FSL
- 6 – : 30
- 7 – – 220 115
- 8 – :
- 9 –
- 10 – 220 /115

FSH:

FSH.

/ NC.

()

/NC.

/NC

FSH.

1. FSH/FSL : FSH.
 2. LO ().
 3. () «S» ().
 4.
 5. «set point» .
 6. - .
 . , HI (,)
 5. , ,
 1/2 .
 7. (0~30):
 , .
 , .

FSL: FSL.
 (, FSL.
 /NC. ()
 , /NC (/NC)
 ,
 FSL.

1. FSH/FSL : FSL.
 2. LO ().
 3. () «S» ().
 4.
 5. .
 6. HI (,) 5. ,
 .
 . , ,
 1/2 .
 7. (0~30):
 , .
 , .

SB 2

Order No. _____

- 10:** Standard Type (1"PT)
- 11/12:** Standard Type/Standard L Type (3/4"PT)
- 20:** Hi-Temp Type (232°C)
- 28:** Super Hi-Temp Type (450°C)
- 50:** Cable Type
- 60:** Mini Type

MATERIAL _____

- 0:** SUS304 **6:** SUS316 **L:** SUS316L

POWER _____

- A:** 115/230Vac ± 10%, 50/60Hz---to have Remote test
- B:** 24Vdc ± 20%---to have Remote test
- C:** 115/230Vac ± 10%, 50/60Hz
- D:** 24Vdc ± 20%

Connection _____

Dimension		Specification	
C ---3/4"(20A)*	M ---5kg/cm ²	Q ---PT	
D ---1"(25A)	N ---10kg/cm ²	R ---PF	
E ---1-1/2"(40A)	O ---150 Lbs	T ---BSP	
F ---2"(50A)	P ---300 Lbs	U ---NPT	
G ---2-1/2"(65A)	W ---PN 10	V ---GAS	
H ---3"(80A)	X ---PN 16	S ---Others	
I ---4"(100A)	Y ---PN 25		
J ---5"(125A)	Z ---PN 40		
K ---6"(150A)	3 ---1-1/4"(32A)		
S ---Others	*3/4" connection is only available for SB2100, 2110, 2120, 2600.		

Probe Length (unit: mm) _____

- 0500:** below 500mm
- 1000:** 501~1000mm
- 1500:** 1001~1500mm
-
-
-

- ※ 500mm per Unit
- ※ Use English letter as first code for probe length over 10m.
A150 represents 15m, A200 represents 20m

SB17

Order No. _____

- 10: Explosion Proof Standard Type(1"PT)
- 11/12: Explosion Proof Standard Type /Standard L Type (3/4"PT)
- 20: Explosion Proof Hi-Temp Type (232°C)
- 28: Explosion Proof Super Hi-Temp Type (550°C)
- 50: Explosion Proof Cable Type
- 60: Explosion Proof Mini Type

MATERIAL _____

- 0: SUS304 6: SUS316 L: SUS316L

POWER _____

- A: 115/230Vac ± 10%, 50/60Hz---to have Remote test
- B: 24Vdc ± 20%---to have Remote test
- C: 115/230Vac ± 10%, 50/60Hz
- D: 24Vdc ± 20%

Connection _____

Dimension	Specification	
C---3/4"(20A)*	M---5kg/cm ²	Q---PT
D---1"(25A)	N---10kg/cm ²	R---PF
E---1-1/2"(40A)	O---150 Lbs	T---BSP
F---2"(50A)	P---300 Lbs	U---NPT
G---2-1/2"(65A)	W---PN 10	V---GAS
H---3"(80A)	X---PN 16	S---Others
I---4"(100A)	Y---PN 25	
J---5"(125A)	Z---PN 40	
K---6"(150A)	3---1-1/4"(32A)	
S---Others	*3/4" connection is only available for SB2100, 2110, 2120, 2600.	

Probe Length (unit: mm) _____

- 0500: below 500mm
- 1000: 501~1000mm
- 1500: 1001~1500mm
-
-
-

- ※ 500mm per Unit
- ※ Use English letter as first code for probe length over 10m.
A150 represents 15m, A200 represents 20m