

SBS series - Solenoid valve Direct operated (General)

Operation specification and Order expression (Stainless steel body) **CHELIC PNEUMATIC**

How to order



SBS	01	240VDC	K	L
2 ports 2 positions solenoid valve SBS : Direct operated (General)	Dimensions: 01 : 1/8" C6 : Fitting type C6 (Please refer to specification)	Voltage : 24 VDC / 6.5W 110 VAC / 8.5VA 220 VAC / 8.5VA	Connection type K : With wire Without indicator light W : With wire length 500mm	Connection type None : Standard type L : With LED


Specification

Item \ Model		SBS-01	SBS-C6
Fluid		Suitable for the fluid of air	
Range of service temperature °C		-5 °C ~ 80 °C	
Number of position ports		2 ports 2 positions solenoid valve	
Valve function		Normally close	
Operating method		Direct operated (General)	
Connection port Rc		1/8"	Ø6
Orifice mm²		4.9	4.9
CV value		0.27	0.27
Pressure range (Max. range) kgf/cm² (kpa)	Air	0 ~ 7 (0 ~ 70)	
	Water		
	Vapor		
Material	Body	Cast the stainless steel accurately # 316	
	Diaphragm	NBR	
	Spring	Stainless steel	
Weight g		110	110



Note : This product is not suitable for the liquid of high temperature, the fluid of solid while cooling and the fluid of corrosive and viscosity exceed 20CST.

External dimension

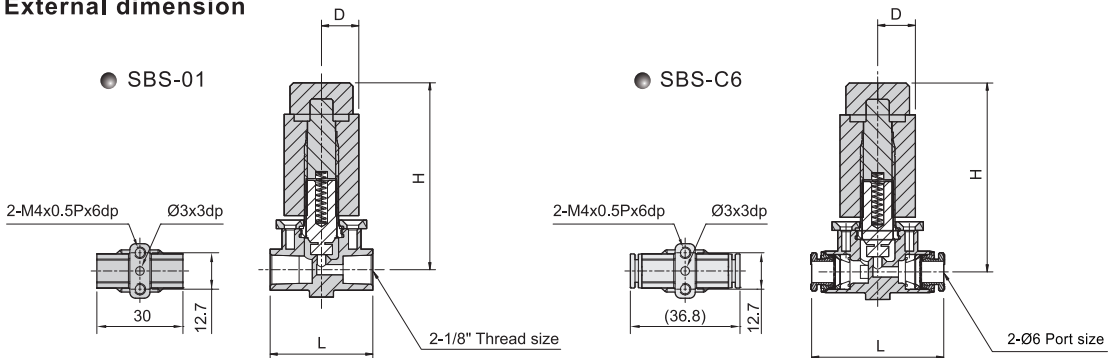

Code	Model	SBS-01	SBS-C6
D		11	11
H		54.6	54.6
L		30	32.6

SBS
Solenoid Valve

SUD
Solenoid Valve

SUW
Solenoid Valve

SUS
Solenoid Valve

SAS
Solenoid Valve

SDC
Solenoid Valve