

SN series - SN 800


Solenoid valve - 5 ports 2 positions

External dimensions / Flank port / NAMUR

CHELIC PNEUMATIC


SN - 810

Single coil 5 ports 2 positions

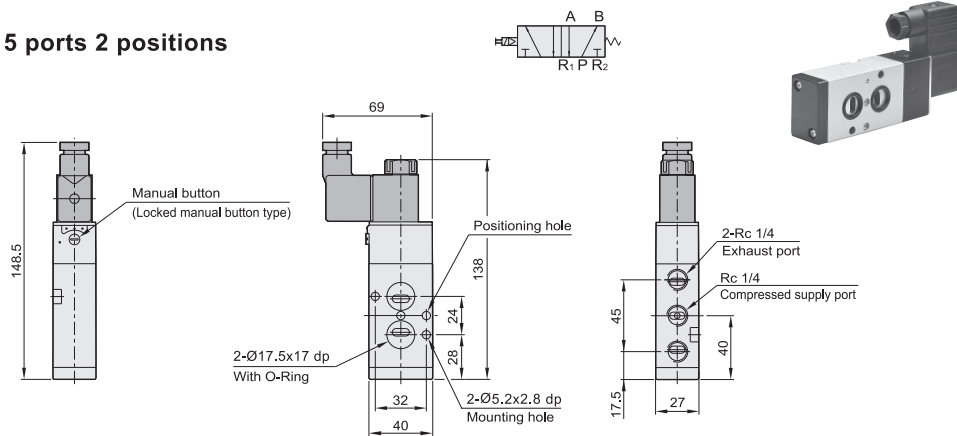

SN - 820

Double coil 5 ports 2 positions

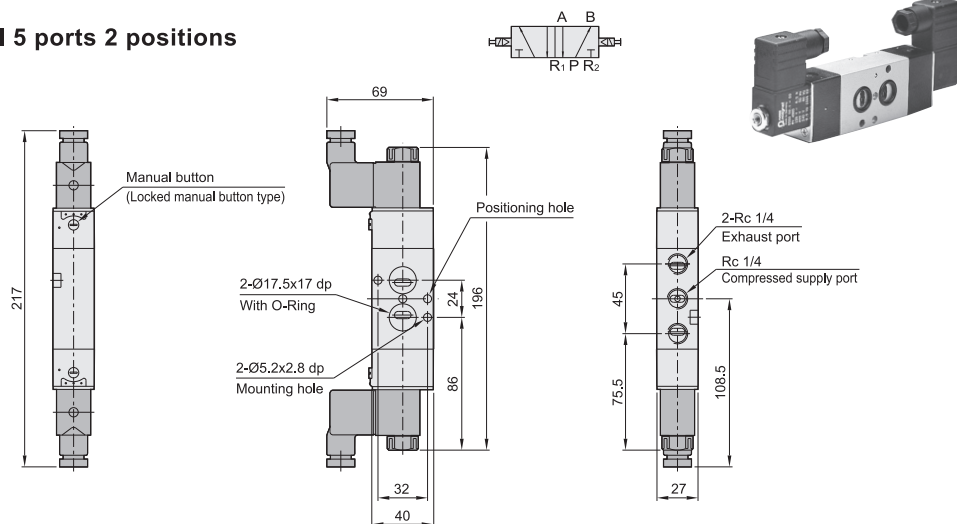

How to order

SN	8	1	0	110 VAC	K	L
Model	Coil no.	Positions no.	Voltage type	Connection type	With indicator light	
SN series Solenoid valve	8 : 800 series	1 : Single 2 : Double	0 : 2 Pos.	Standard : 24 VDC / 2.5W 110 VAC / 5VA 220 VAC / 5VA Special voltage : 12 VDC / 2.5W 24 VAC / 8.5VA 220 VAC / 8.5VA Suitable for 190~250V (For high pressure range)	ISO Socket solenoid type (Special voltage option)	None (Standard) Without indicator light (Black case) ISO Socket solenoid type with indicator light for AC, DC (Transparent case)
					Solenoid with wire (500mm) (Wired solenoid are standard voltage only)	

SM
Solenoid
Valve

SMB
Solenoid
Valve

SMU
Solenoid
Valve

SMUB
Solenoid
Valve

SR
Solenoid
Valve

SRB
Solenoid
Valve

SRU
Solenoid
Valve

SRUB
Solenoid
Valve

SRK
Solenoid
Valve

SK
Solenoid
Valve

SNK
Solenoid
Valve

SKU
Solenoid
Valve

SV
Solenoid
Valve

SN
Solenoid
Valve

SV310
Solenoid
Valve