


SUD series - Solenoid valve Direct operated (General)

Operation specification and Order expression

CHELIC PNEUMATIC

How to order

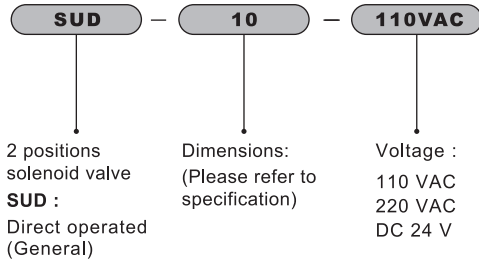



Specification

Item \ Model		SUD-6	SUD-8	SUD-10	SUD-6H	SUD-8H	SUD-10H
Fluid		Suitable for the gas of air, water and vacuum					
Range of service temperature °C		-5 °C ~ 80 °C					
Number of position ports		2 ports 2 positions solenoid valve					
Valve function		Normally close (Custom made for normally open type)					
Operating method		Direct operated (General)					
Connection port							



Note : This product is not suitable for the liquid of high temperature, the fluid of solid while cooling and the fluid of corrosive and viscosity exceed 20CST

External dimension



Code \ Model	SUD-6	SUD-8	SUD-10	SUD-6H	SUD-8H	SUD-10H
D	21		48	21		48
H	63		75	63		75
L	41		53	41		53